


- ❖ Three part construction comprising a Zintec steel body, an aluminium gear tray with a glass diffuser.
- ❖ LED array is bonded directly to the gear tray for improved thermal performance.
- ❖ Available with integrated Microwave sensor.
- ❖ Ingress Protection rating: **IP66**
- ❖ Impact Resistance rating: **IK09**
- ❖ Power Consumption: **40W**
- ❖ Lumen Output: **4,000 lumens**
- ❖ Part Number: **SIR-40**
- ❖ Options:
  - ❖ **20W** version, output **2,000 lumens (SIR-20)**
  - ❖ For Microwave Sensor add suffix **MWS**
  - ❖ For Emergency Conversion add suffix **EMC**



A robust luminaire suitable for use in both interior or exterior locations. The body is made from a Zintec steel. Rated to IP66 for particle and moisture ingress and also rated to IK8 for impact strength. Can be used with an integrated occupancy sensor which will lower the light output to a pre-determined level when the controlled space is unoccupied. Self-contained, Maintained Emergency conversions are also available.

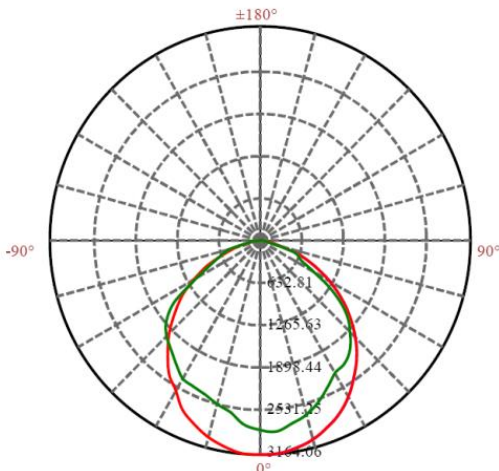

#### Dimensions

- Length 1260mm
- Width 90mm
- Depth 110mm

